

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 238 628 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.09.2002 Bulletin 2002/37

(51) Int Cl.7: **A61B 5/0484, A61B 5/0478**

(21) Application number: **01610023.2**

(22) Date of filing: **09.03.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Köpke, Wolfgang**
13629 Berlin (DE)

(74) Representative: **Christensen, Mikael T.**
C/O Oticon A/S
Strandvejen 58
2900 Hellerup (DK)

(71) Applicant: **Maico Diagnostic GmbH**
13629 Berlin (DE)

(54) Device for determining acoustically evoked cerebral potentials

(57) The invention relates to a device for determining acoustically evoked brain potentials in brainstem audiometry from electrodes applied to the head of a subject, where the device comprises a plurality of electrodes, i.e. at least one pickup electrode and a reference

electrode, to be applied at different points of the head, where the device comprises means for determining the impedance between the electrodes and the head as well as means for visually indicating a level of impedance or delivering this information to the connected audiometer.

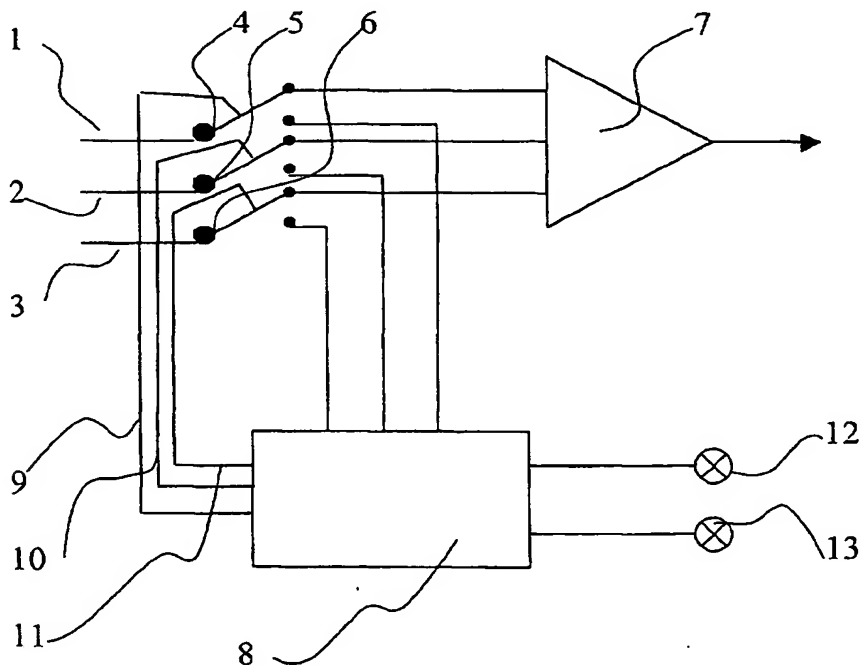


FIG. 1

EP 1 238 628 A1

Description

BACKGROUND OF THE INVENTION

[0001] The derivation of acoustically evoked electrical brain potentials of a subject is a known audiometric diagnostic method for testing hearing and for evaluating various causes of hearing damage without the active participation of the subject.

[0002] This method is referred to in the field as ERA (electric response audiometry) or BERA (brainstem electric response audiometry) or brainstem audiometry. Areas of application for this method include for example the performance of the first hearing tests in newborns, testing the hearing of infants or of unconscious persons such as accident victims for example, and the diagnosis of neurologic diseases, for example neurinomas of the acoustic nerve. Intraoperative hearing tests are also possible with this method.

[0003] Electrical brain potentials are triggered by acoustic stimulation of the ear with conduction through air or bone. Headphones are usually used for the purpose. The electrical signals that are thus generated by the brainstem are picked up by electrodes applied to the head. Usually three electrodes are used, namely one electrode to determine the reference potential and two active electrodes to derive the acoustically-evoked electrical signals at two different locations on the head.

[0004] Acoustic stimulation of the ear can take for example the form of click stimuli or, for direct determination of the hearing threshold, of a rapid sequence of clicks with increasing volume. Other types of stimuli are of course also possible. The brainstem generates potential waves at each click, which are averaged after being picked up and conducted away by the electrodes.

[0005] In the previously known devices the measuring results are relying on a constantly good electrical connection between the head and the electrode, resulting in low impedance. In practise this is however not always a simple task. The measurements may often be repeated due to poor measuring results, which are not detected during measurement. There is for this reason a need for improvement of the previously known devices of this type.

[0006] It is therefore an object of the invention to provide a device to permit simpler and easier use and hence achievement of better results while performing brainstem audiometry.

SUMMARY OF THE INVENTION

[0007] This object is achieved by the device described in claim 1.

[0008] By providing a visual indication of the impedance level there is a possibility of checking this during measurement and hence provide an immediate correction to the positioning of the electrode so as to achieve the desired low impedance.

[0009] In a preferred embodiment the means for visually indicating a level of impedance are located on the structure holding the electrodes, or a preamplifier where the electrodes are connected via cables. This allows for a simultaneous visual contact with the structure during a correction operation and the indicator means.

[0010] Preferably the means for determining the impedance are integrated with the structure or the device. This also improves the operation and visibility of the indicator means.

[0011] In a preferred embodiment the means for determining the impedance comprises switching arrangements for each electrode enabling the switching of each electrode into a impedance measuring mode and back to normal brain potential measuring mode. This provides for a possibility of obtaining a reliable measurement of the impedance without disturbing the measurement.

[0012] In one preferred embodiment the means for visually indicating a level of impedance comprises a single light emitter, e.g. a diode, indicating either a low or a high impedance level.

[0013] In another preferred embodiment the means for visually indicating a level of impedance comprises two light emitters, e.g. diodes, where one is indicating a low impedance level and the other is indicating a high impedance level.

[0014] In an device according to the invention, the electrode unit can also include an electroencephalograph ("EEG") amplifier as a component, so that a minimum conduction path is provided between the pickup electrodes and the EEG amplifier, and thus the possibility of stray potentials being picked up is minimized.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

FIG. 1 shows a schematic circuit forming part of the device according to the invention,

FIG. 2 shows a top view of a part of an example of a device according to the invention,

FIG. 3 shows a bottom view of a part of a device according to the invention,

FIG. 4 shows a side view of a part of a device according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0016] The device according to the invention will now be described briefly in terms of its important details, with reference to the embodiments shown in the enclosed drawings.

[0017] From FIG. 1 a schematic diagram appears. The diagram shows three inputs 1,2,3 each leading to

a switch 4,5,6. The switches are switching between a measuring mode and a test mode. In the measuring mode the input signals are transmitted to an EEG amplifier 7 and further to an audiometer used in a measuring process. In the test mode the impedance is measured between the electrode and the skin of the individual on which the electrodes are placed. The test of the impedance is carried out with a predetermined sampling frequency and is controlled by the control electronics 8 adapted to control the switches via connections 9,10,11. The result of the impedance measurement is indicated by the diodes 12,13, where one indicated a too high level of the impedance and the other one indicated a satisfactory low level of the impedance.

[0018] The device according to FIG. 2, 3 and 4 consists of a housing 14 with a plurality of arms that have electrodes 15,16,17 at their ends, a earphone 18 integrated in the housing. An EEG amplifier (not shown) forms part of the device.

[0019] A cable (not shown) connects the device with the rest of the audiometer used for brainstem audiometry, said audiometer generating the signals for acoustic stimulation of the ear and processing and evaluating the derived brainstem potentials. In the embodiment, a single cable is shown that can contain both a line to supply electrical click signals and also a line to conduct the preamplified brainstem potentials from EEG amplifier. Of course, separate cables or wireless transmission pathways can also be used for the purpose.

[0020] The electrical potentials generated in the brainstem by acoustic stimulation of the ear are picked up by the electrodes on the arms. Usually three electrodes are used, namely a reference electrode for detecting a reference potential and two pickup electrodes. The reference electrode is brought into contact with the head in front of the ear, and one of the two deriving electrodes is placed behind the ear and the other in the area of the crown of the head.

[0021] In the embodiment according to FIG. 3, electrode 17 is the pickup electrode that detects brainstem potentials in the vicinity of the crown of the head and electrode 16 is the reference electrode. The second pickup electrode 15 is applied to the head behind the ear.

Claims

1. A device for use in determining acoustically evoked brain potentials in brainstem audiometry from electrodes applied to the head of a subject, the device comprising: a plurality of electrodes comprising at least one pickup electrode and a reference electrode, to be applied at different points of the head, where the device comprises means for determining the impedance between the electrodes and the head as well as means for visually indicating a level of impedance.

2. A device according to claim 1, where the electrodes are mounted on a structure and where the means for visually indicating a level of impedance are located on the structure holding the electrodes.
3. A device according to claim 1, where the means for visually indicating a level of impedance are located on a preamplifier where the electrodes are connected via cables.
4. A device according to claim 1, 2 or 3 where the means for determining the impedance are integrated with the device, preferably a structure holding the electrodes.
5. A device according to any of the preceding claim, where the means for determining the impedance comprises switching arrangements for each electrode enabling the switching of each electrode into a impedance measuring mode and back to normal brain potential measuring mode.
6. A device according to any of the preceding claims, where the means for visually indicating a level of impedance comprises a single light emitter, e.g. a diode, indicating either a low or a high impedance level.
7. A device according to any of the preceding claims, where the means for visually indicating a level of impedance comprises two light emitters, e.g. diodes, where one is indicating a low impedance level and the other is indicating a high impedance level.
8. A device according to any of the preceding claims, where the means for information the level of the of impedance is send via a cable ore wireless to the audiometer.

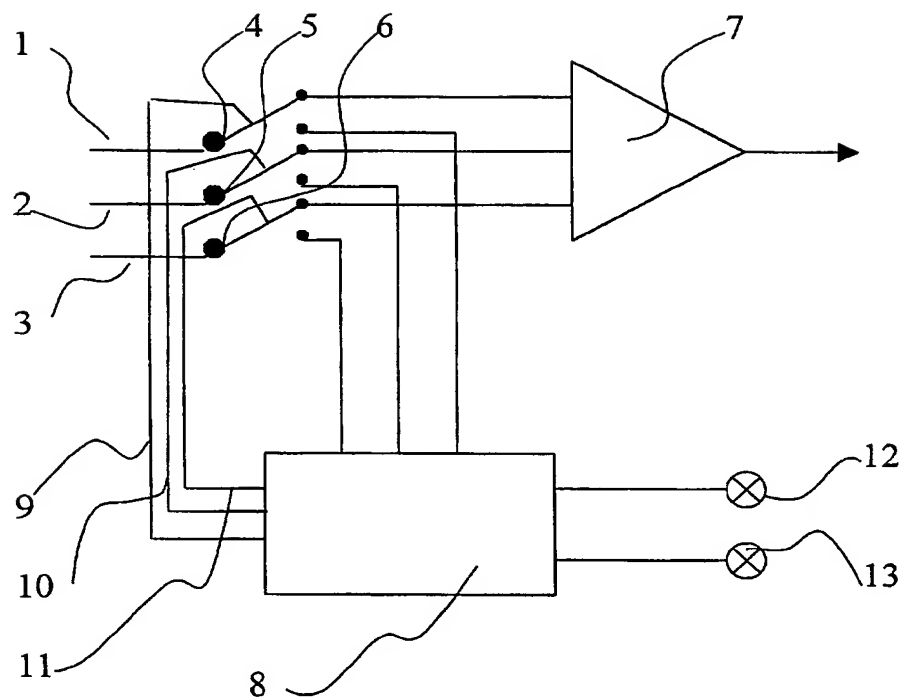


FIG. 1

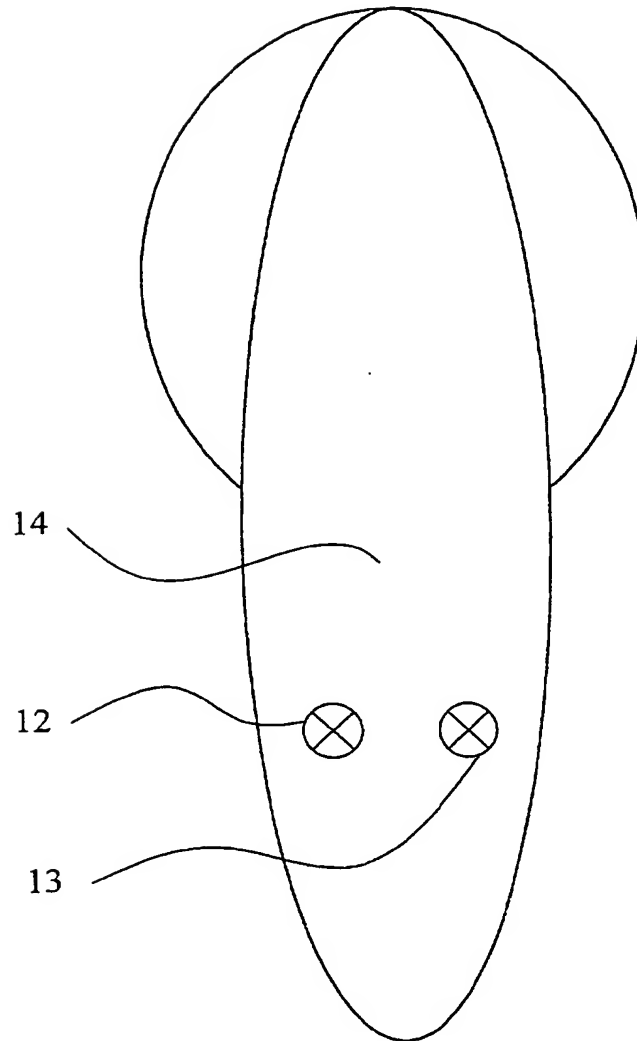


FIG. 2

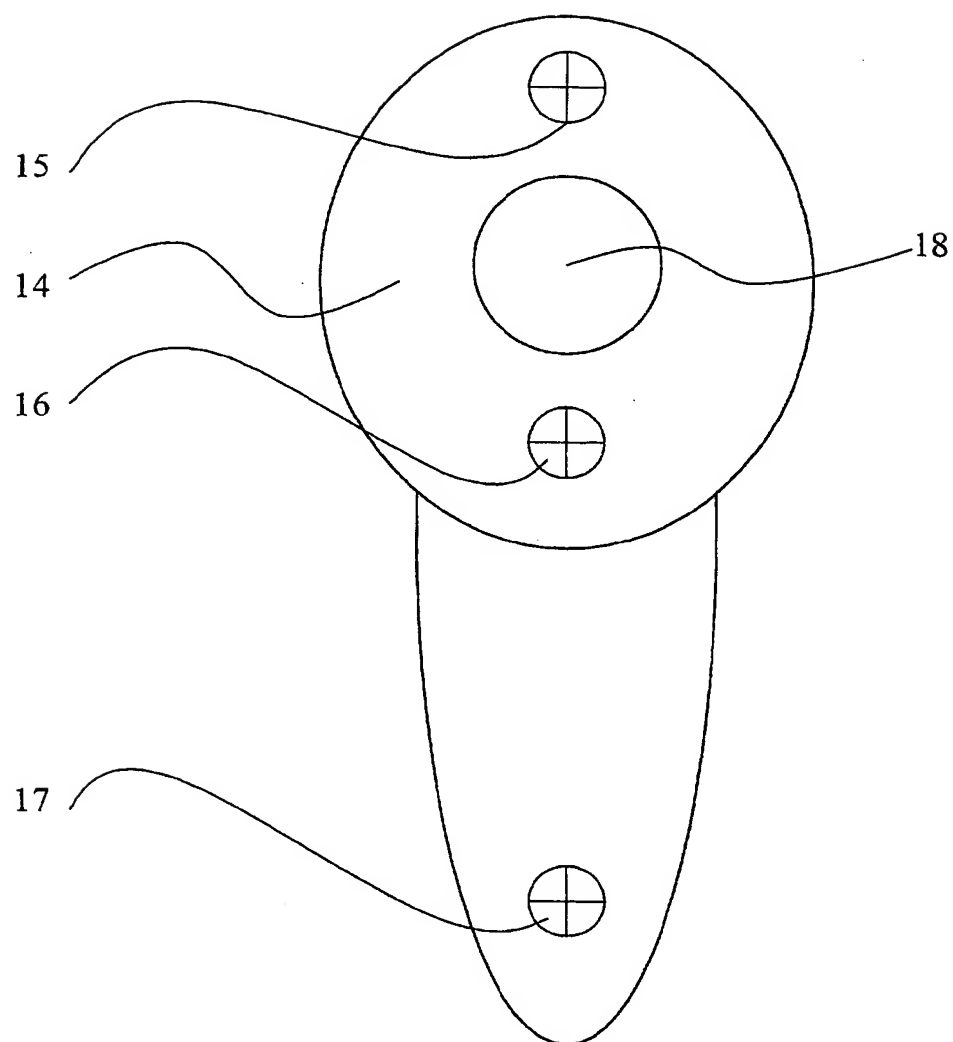


FIG. 3

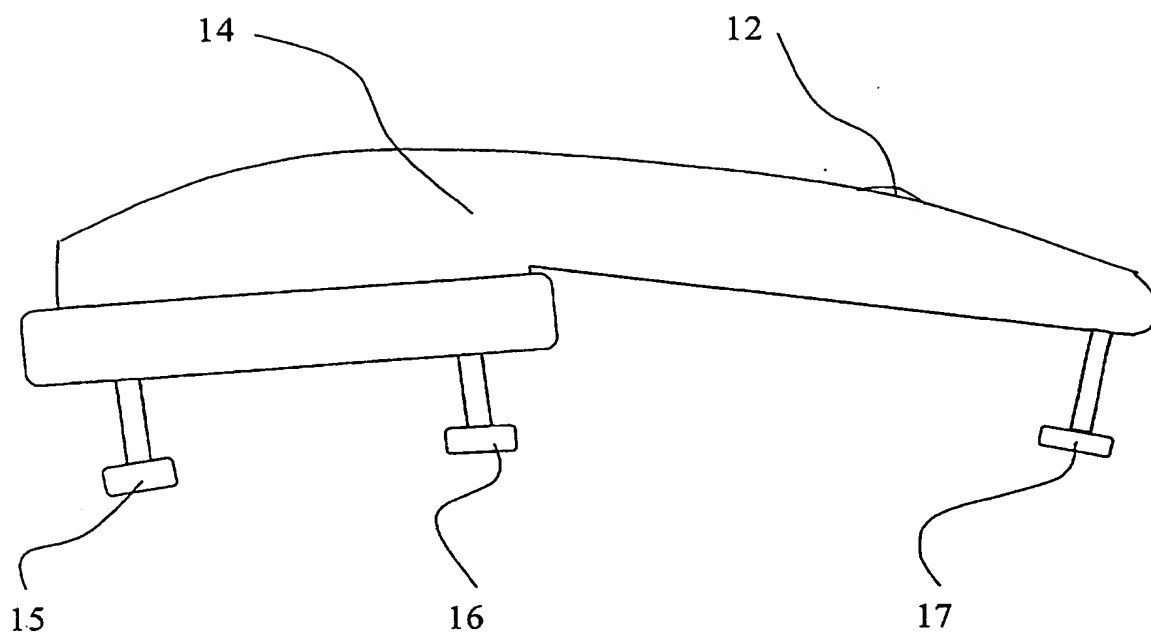


FIG. 4



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 61 0023

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 998 213 A (PRICE ROBERT A) 21 December 1976 (1976-12-21) * column 7, line 54-62; figures 1,12 *	1,3,4,6	A61B5/0484 A61B5/0478
Y	---	5,7	
Y	US 5 813 404 A (MARCUS TODD A ET AL) 29 September 1998 (1998-09-29) * column 5, line 11-17; figures 5,6 *	5	
Y	US 5 606 978 A (ARMSTRONG DAVID R ET AL) 4 March 1997 (1997-03-04) * column 4, line 34 - column 5, line 67; figure 1 *	7	
X	US 5 954 667 A (FINKENZELLER PETER ET AL) 21 September 1999 (1999-09-21) * abstract; figures 1-3 * * column 4, line 53 - column 5, line 6 *	1-3,8	
A	EP 0 813 840 A (JAEGER ERICH GMBH & CO KG) 29 December 1997 (1997-12-29) * column 12, line 40 - column 13, line 22; figure 8 *	4,5	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A61B
A	US 5 601 091 A (DOLPHIN WILLIAM F) 11 February 1997 (1997-02-11) * column 6, line 1-8 * * column 6, line 59-63; figures 1,3 *	1,4,5	
A	US 5 755 230 A (BUCKETT JAMES R ET AL) 26 May 1998 (1998-05-26) * abstract; figure 1 *	8	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 7 August 2001	Examiner Jonsson, P.O.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP 01 61 0023 (P01C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 61 0023

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-08-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3998213	A	21-12-1976	NONE	
US 5813404	A	29-09-1998	AU 708245 B	29-07-1999
			AU 7517196 A	07-05-1997
			CA 2235317 A	24-04-1997
			EP 0863719 A	16-09-1998
			JP 11513592 T	24-11-1999
			WO 9714358 A	24-04-1997
			US 6236874 B	22-05-2001
US 5606978	A	04-03-1997	EP 0650342 A	03-05-1995
			WO 9401040 A	20-01-1994
US 5954667	A	21-09-1999	DE 29615656 U	02-01-1997
			DE 19736856 A	12-03-1998
			EP 0827714 A	11-03-1998
EP 0813840	A	29-12-1997	DE 19624133 A	18-12-1997
			DE 59701248 D	20-04-2000
			ES 2143817 T	16-05-2000
US 5601091	A	11-02-1997	AU 6591796 A	26-02-1997
			EP 0853462 A	22-07-1998
			WO 9704704 A	13-02-1997
			US 5916174 A	29-06-1999
US 5755230	A	26-05-1998	AU 7369196 A	09-04-1997
			CN 1199329 A	18-11-1998
			EP 0852476 A	15-07-1998
			JP 11511367 T	05-10-1999
			WO 9710747 A	27-03-1997

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)